




N A G A R J U N
INTERNATIONAL TRADING COMPANY

We Grow Together...























AN ISO 9001: 2015 CERTIFIED COMPANY

INDUSTRIAL WASHING, FINISHING EQUIPMENTS & POWER LAUNDRY MACHINERIES

Top Loading Washing Machine | Economical Series

PERFORMANCE

Specially Designed by us
220V /1Ø
32
Adjustable 0-30 Seconds
Pulsator
0-60 min controlled by timer
Manually Operated by Switches

SAFETY

Door Open Cut Off	Limit Switch
-------------------	--------------

CONSTRUCTION

Stainless Steel 304 Grade
Stainless Steel 304 Grade
Turret Punch Press
Stainless Steel 304 Grade
Mild Steel
SS 304 Grade with lock
Screw Rod
Stainless Steel
Stainless Steel
CNC
CNC
Laser MIG/TIG

AESTHETIC

Overall Finish	Gloss
Logo	Starfish Engraving with LED Lights

GENERAL

Model	STWP 12	
Dry Weight in Kg	12	
Drum Size in mm	0600 X 510	
Drum Volume in Liter	145	
Liquor Ratio	1:12	
Over All Dimension in mm	600 X 750 X 900	
Door Open in mm	450mm	

TECHNICAL SPECIFICATION

Water Inlet in mm	19
Drain Outlet in mm	37
Foundation	Required
Weight in Kgs	100
Motor Power in kw	0.37




material, meeting the standards of industrial requirements.

- It features a convenient 30 seconds forward and reverse function, Washing time typically last between 5 to 10 minutes per cycle.
- This machine can accommodate approximately 5 to 7 bed sheets per cycle or 15 to 20 shirts per cycle.
- With a low power consumption of only 0.3 units per cycle and a water consumption of 80 litres per cycle.



Hydro Extractor Direct Drive | Economical Series

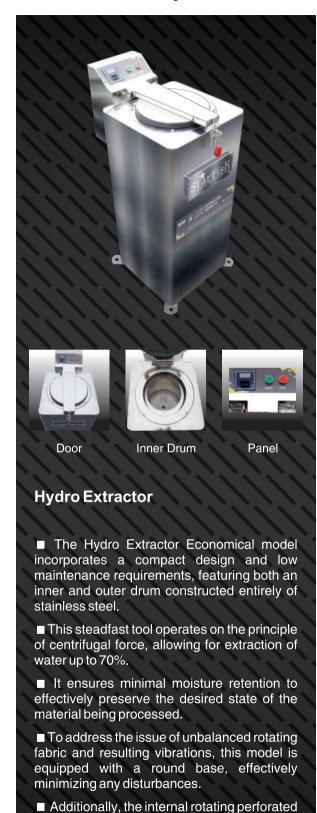

PERFORMANCE

Motor Brand	Specially Designed by us
Volt	220 / 1Ø
Rpm	1000
VFD (Optional)	Adjustable Drum Rotation 0-1000 RPM
Extraction Time	0-15 min controlled by timer
Control panel	Manually Operated by Switches
Breaking	Self Stop
Drum with Motor	Directly Connected with Motor

SAFETY

Door Open Cut Off	Limit Switch

CONSTRUCTION

Outer Drum	Stainless Steel 304 Grade
Inner Drum	Stainless Steel 304 Grade
Perforation	Turret Punch Press
Back Cover	Stainless Steel 304 Grade
Base Plate	Mild Steel
Door	SS 304 Grade with lock
Spring Adjustment	Screw Rod
Nuts, Bolts & Connectors	Stainless Steel
Control Box	Stainless Steel
Cutting	CNC
Bending	CNC
Welding	Laser TIG/MIG

AESTHETIC

Overall Finishing	Gloss
Logo	Starfish Engraving with LED Lights

GENERAL

Model	SDHP 10	
Dry Weight in Kg	10	
Drum Size in mm	Ø300 x 360	
Dimension in mm	410 x 500 x 900	
Door Open in mm	340	
TECHNICAL SPECIFI	CATION	

TECHNICAL SPECIFICAT	ION	
Drain Outlet in mm	37	
Centrifugal Effect (%)	70-75	
Foundation	Required	
Weight in Kgs	80	
Motor Power in kw	0.37	

efficiency.

basket is dynamically balanced, further enhancing its stability and operation

